

INSTALLATION MANUAL

IMPORTANT SAFETY PRECAUTIONS


Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire’s ventilation by covering with material that will cause luminaire to overheat and potentially shorten the lifespan.
- Ensure LED luminaire has the correct polarity before installation.



WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions. This product should be installed, inspected and maintained by a qualified electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

DIMENSION

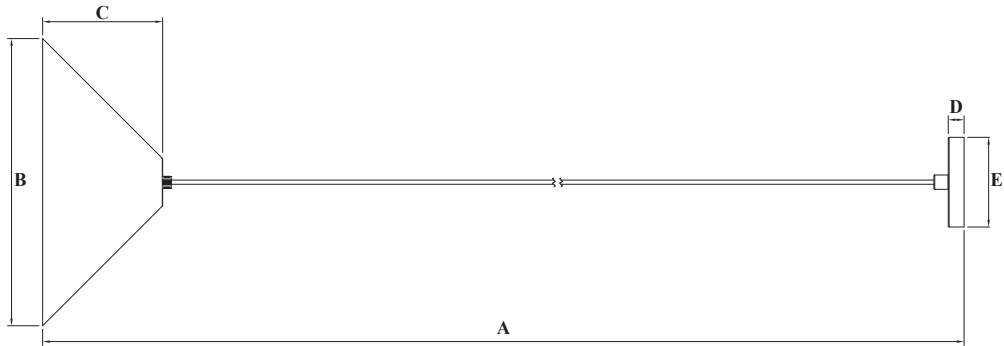

Dimension (Inch)	A				B				C				D				E			
	P23	P24	P28	P29	P23	P24	P28	P29	P23	P24	P28	P29	P23	P24	P28	P29	P23	P24	P28	P29
5"				59"	118"			7.87"				3.9"				0.98"				4.9"
7"				59"	118"			11.8"				5.9"				0.98"				4.9"
9"	59"	118"	59"	118"	59"	118"	59"	118"	15.7"	14.6"	11.8"	13.7"	6.6"	6.6"	7.55"	6.9"	0.98"	0.98"	0.98"	4.9"
12"	59"	118"	59"	118"				59"	118"	19.0"	17.8"		15.7"	7.8"	7.8"		7.87"	0.98"	0.98"	0.98"
15"					59"	118"						19.6"				9.84"				0.98"

X 1PCS



Remark: The appearance of the lampshade is subject to the actual model.

X 2PCS




X 3PCS




X 3PCS




INSTALLATION DIAGRAM

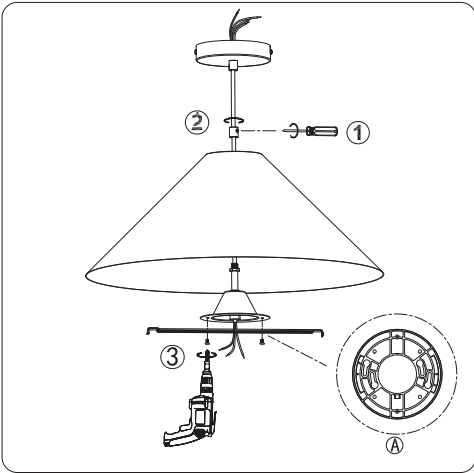


1. Loosen the screw on the side of the canopy nut using a suitable tool (1). Unscrew and separate the canopy nut from the threaded rod of the junction box (2). Then, secure the fixture mounting bracket to the junction box using screws (3). The appearance of the mounting bracket may vary depending on the specific model. As shown in Figure (A), the mounting bracket illustrated is for the P61 fixture model.

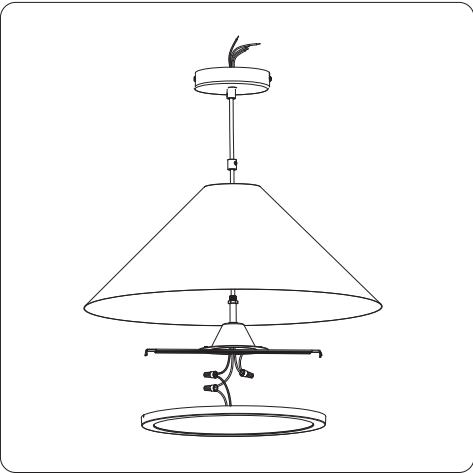


2. Use a terminal block to connect the fixture power wire to the suspension wire, then secure the mounting bracket to the fixture.

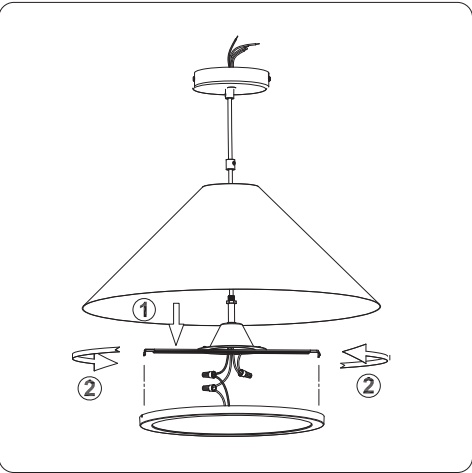


3. Neatly arrange the wiring inside the pendant junction box. Align the mounting bracket clips with the fixture mounting slots and insert the mounting bracket (1). Then rotate the mounting bracket in the direction indicated by the arrow until it is securely locked in place (2).

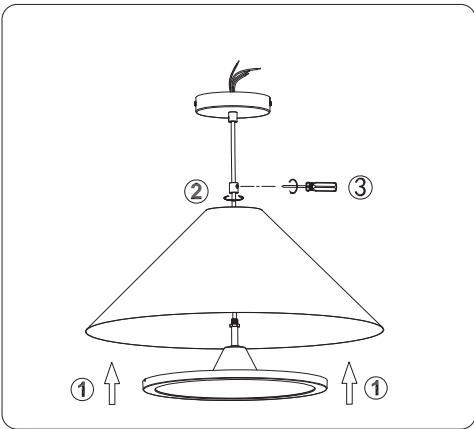


4. Pull the suspension wire at the top of the lampshade to draw the fixture tightly against the inside of the lampshade (1). Secure the canopy fixing nut onto the threaded nipple of the junction box (2), then tighten the side locking screw on the nut to firmly secure it (3).

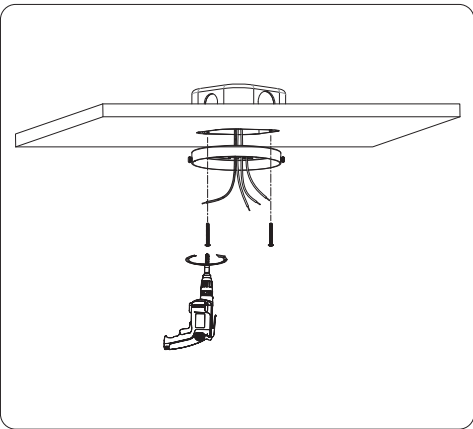


5. Turn off the main power supply. Attach the mounting bracket to the octagonal junction box using the screws included in the accessory pack.

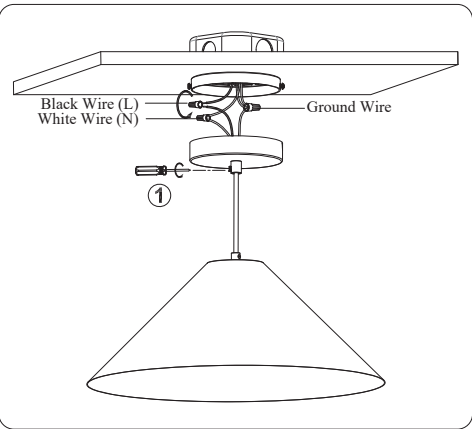

6. Use wire connectors to connect the fixture L/N wires to the corresponding L/N power supply wires from the octagonal junction box. Connect the ground wire to the ground wire accordingly. Adjust the side screw on the canopy nut to set the length of the suspension cable (1).

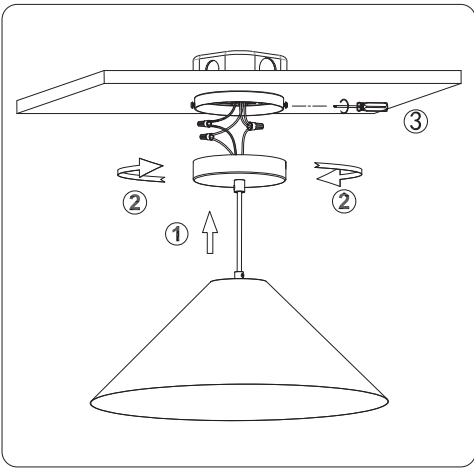

7. Neatly arrange the wires inside the octagonal junction box. Align the L-shaped slots on the side of the canopy with the pre-installed screws on the mounting bracket. Push the canopy upward toward the ceiling (1), then rotate it in the direction indicated by the arrow until it is fully secured to the mounting bracket (2). Finally, tighten the side screws on the mounting bracket to lock the canopy in place (3).

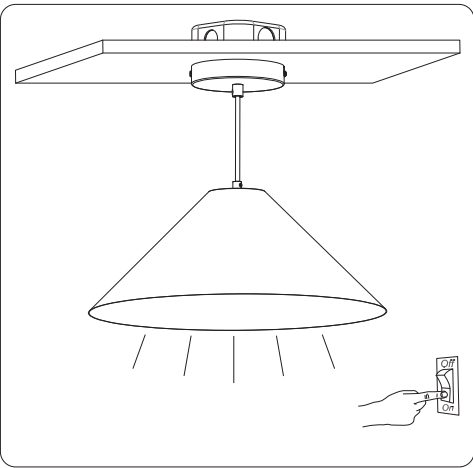

8. Turn on the power switch. After confirming the light operates properly, the installation is complete.