

INSTALLATION MANUAL

IMPORTANT SAFETY PRECAUTIONS


Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire’s ventilation by covering with material that will cause luminaire to overheat and potentially shorten the lifespan.
- Ensure LED luminaire has the correct polarity before installation.



WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions. This product should be installed, inspected and maintained by a qualified electrician. Installation of luminaire must be in accordance with NEC and local code requirements.

DIMENSION

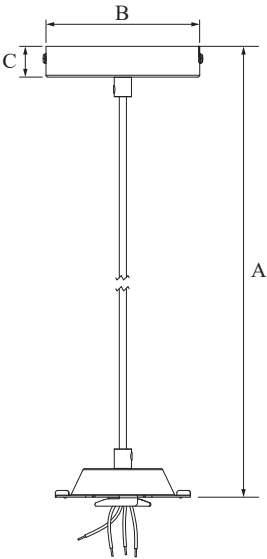

Dimension (Inch)	A	B	C
P13 (59")	59"	4.92"	0.98"
P13 (118")	118"	4.92"	0.98"

Installation Instructions

1. Disconnect the external power supply, remove the product from the packaging, and adjust the hanging cable to the appropriate length;

2. Connect the power L, N, and ground wires of the light fixture to be converted to a hanging method (product C28 shown in the picture) to the L, N, and ground wires of the hanging cable using toothpaste-style connectors;

3. Arrange the connected wires into the quick-connect junction box, align the clips of the quick-connect junction box with the slots in the inner lining, push it into the slots, and rotate it to the desired position. This completes the installation of the product and the quick-connect junction box Quick Wiring and Installation;

4. Use screws to fix the pre-screwed mounting plate (with screws pre-installed at both ends) inside the ceiling plate to the octagonal box;

5. Use the toothpaste-shaped connectors to connect the L, N, and ground wires from the octagonal box. Align the L-shaped clips of the ceiling plate with the pre-locked screws on the mounting plate, push it into the L-shaped groove, and rotate the ceiling plate. Then, fully tighten the screws on both sides;

6. Check the reliability of the installation, then power on to confirm that the light fixture lights up normally. Installation complete.