

INSTALLATION MANUAL

IMPORTANT SAFETY PRECAUTIONS


Before you begin, read these instructions completely and carefully.

- Be certain electrical power is OFF before and during installation, maintenance and removal.
- Luminaire wiring must be properly grounded in accordance with the NEC and any applicable local code requirements.
- Use only UL or IEC approved wire for input/output connections.
- Verify that supply voltage matches voltage on luminaire label. Installation to any other connection may void the warranty.
- Wear gloves during installation to prevent injury and do not expose wiring to metal or sharp edges.
- Do not install in areas subject to combustible vapors or gases. Verify luminaire location ratings are suitable for installation environment (refer to specification sheet as needed).
- Do not restrict luminaire’s ventilation by covering with material that will cause luminaire to overheat and potentially shorten the lifespan.
- Ensure LED luminaire has the correct polarity before installation.




WARNING: To reduce the risk of personal injury or property damage from fire, electrical shock, abrasions, burns and all other hazards, read all provided warnings and follow installation instructions. This product should be installed, inspected and maintained by a qualified electrician. Installation of luminaire must be in accordance with NEC and local code requirements.


PACKAGE CONTENTS

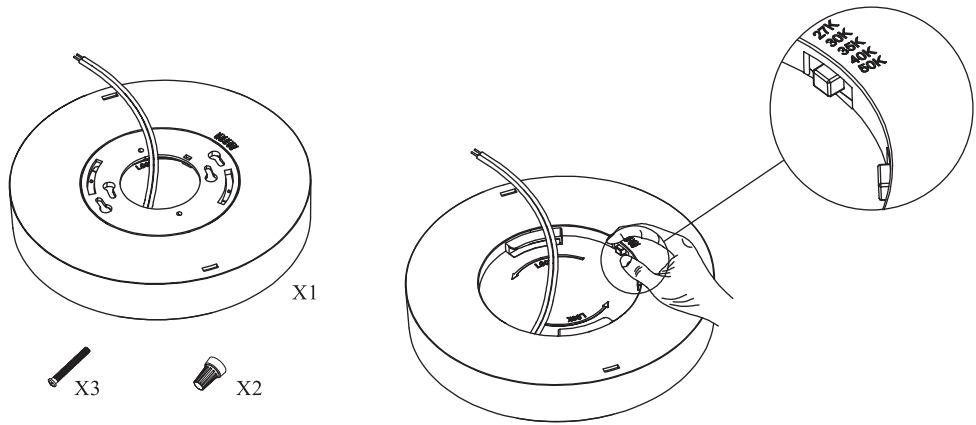


MOUNTING SURFACE

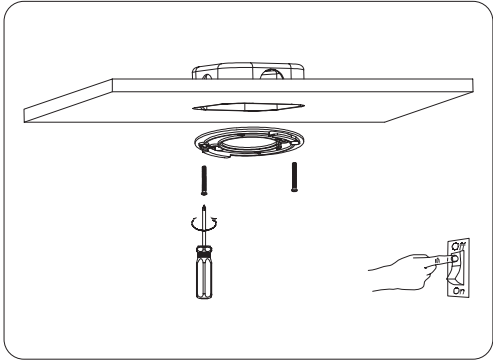


1. Turn off the mains, then lock the mounting bracket to the octagon with the screws in the accessory bag

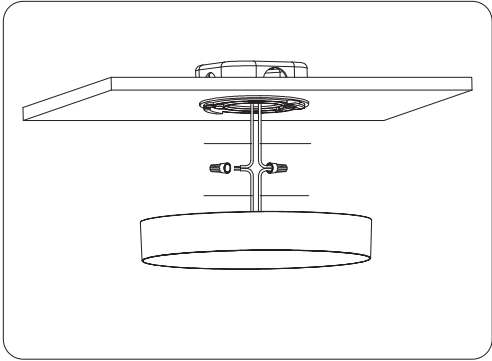

2. Connect the power cable from the octagon box to the lamp inlet cable using the screw terminal in the accessory bag

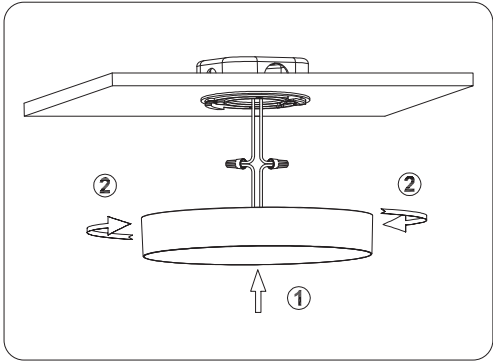

3. The connected wire lamp is close to the junction box, push the line into the octagonal box, align the lamp with the installation bracket, screw in the direction of the arrow to install and fix it

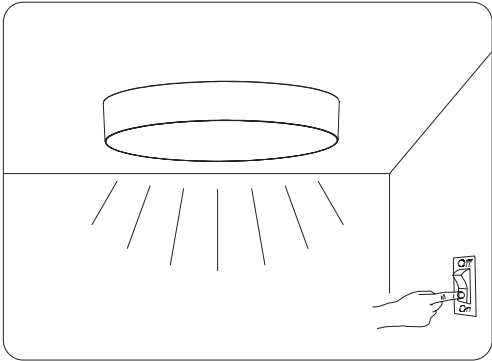

4. Turn on the light, test the light OK, and complete the installation